

# Vaisala Combined Pressure, Humidity and Temperature Transmitter PTU300



More than pressure measurement

# PTU300 Combined Pressure, Humidity and Temperature Transmitter for Industrial Use



*The Vaisala Combined Pressure, Humidity and Temperature Transmitter PTU300 is a versatile, multi-purpose instrument.*

## Features/Benefits

- Barometric pressure, humidity and temperature measurement in one transmitter
- Available with two barometric pressure sensors - for added reliability
- RS-232C serial interface with NMEA protocol for GPS use
- Optional display, RS-485, analog output, and relay
- Optional power supply module
- NIST traceable calibration
- HMT330MIK Installation kit for outdoor use
- Applications include environmental monitoring in calibration laboratories, GPS meteorology: estimating precipitable water vapor in the atmosphere; weather stations

### One transmitter, three measurements

The Vaisala Combined Pressure, Humidity and Temperature Transmitter PTU300 measures barometric pressure in two accuracy classes, humidity, and temperature.


You can choose which probe best suits your needs: PTU301 for laboratories, PTU303 for outdoor use, the warmed PTU307 probe for demanding meteorology, and PTU30T for pressure and temperature only.

### Vaisala proven sensor technology

The PTU300 transmitter uses sensors known for their high accuracy and excellent long-term stability: the Vaisala BAROCAP® is used for pressure measurement and the Vaisala HUMICAP® for humidity measurement. The temperature sensor is a platinum RTD sensor.

### Graphical trend display

The PTU300 series features a large numerical and graphical display, allowing users to easily monitor three-hour measurement trends. It also provides a one-year trend history.

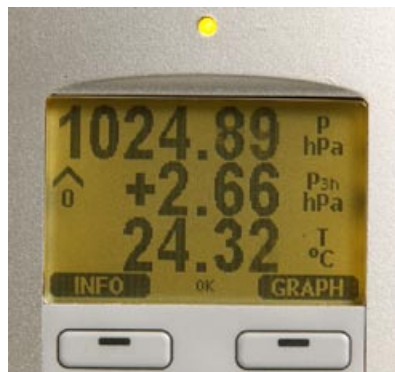

*The display also shows the WMO pressure trend  $\Delta P$  3h and tendency of 0...9.*

### Data collection and transfer to PC

The recorded measurement data can be viewed on the display or transferred to PC with Microsoft Windows® software.

### Flexible calibration

A quick, one-point field calibration for humidity can easily be done using the Vaisala Hand-Held Humidity Meter HM70.

### Serial communication



The PTU300 comes with a standard RS-232 serial interface. The output format is compatible with major GPS receivers and NMEA coded messages. RS-485 is available as an option.

### Outdoor installation kit



The optional HMT330MIK Installation Kit is available for outdoor installation. It provides reliable measurements for meteorological purposes.





For wall-mounting

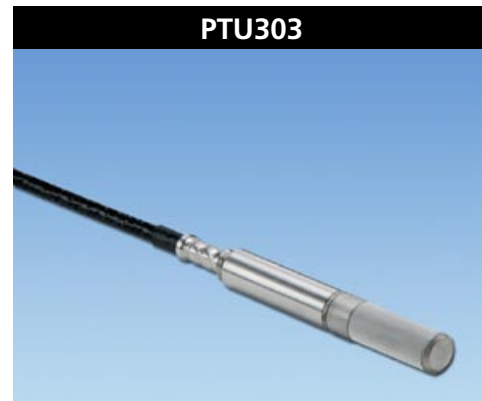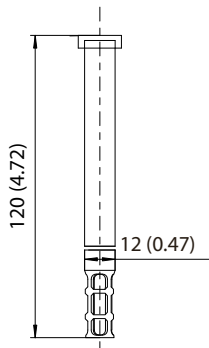


For outdoor use and tight spaces.

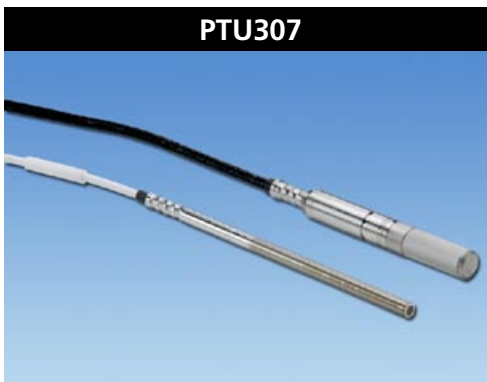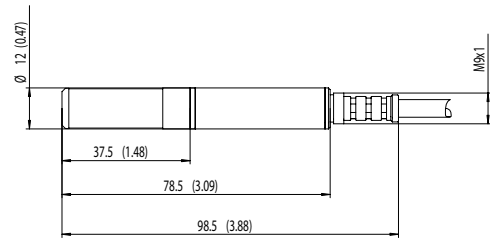

A warmed probe for demanding meteorological measurements.

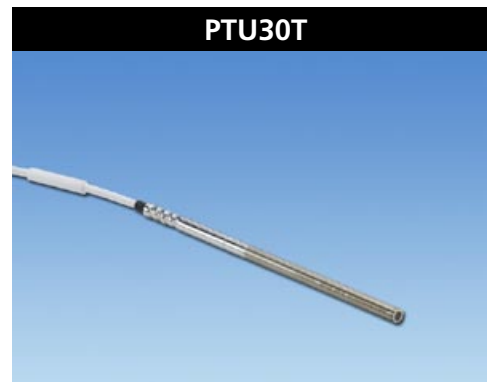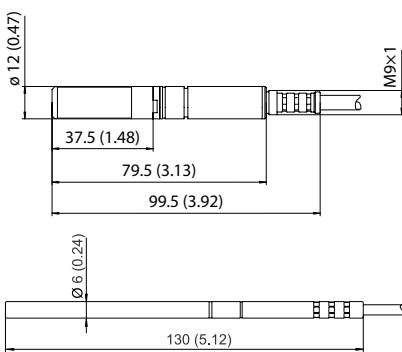

For measuring temperature only.

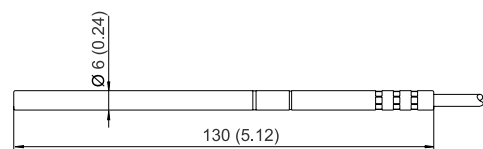

# Technical Data, Dimensions

## Performance

### Barometric pressure

	500 ... 1100 hPa	500 ... 1100 hPa	50 ... 1100 hPa
Pressure range		500 ... 1100 hPa	50 ... 1100 hPa
Accuracy	500 ... 1100 hPa	Class A	Class B
Linearity	±0.05 hPa	±0.10 hPa	±0.20 hPa
Hysteresis*	±0.03 hPa	±0.03 hPa	±0.08 hPa
Repeatability*	±0.03 hPa	±0.03 hPa	±0.08 hPa
Calibration uncertainty**	±0.07 hPa	±0.15 hPa	±0.20 hPa
Accuracy at +20 °C***	±0.10 hPa	±0.20 hPa	±0.30 hPa
Temperature dependence****	±0.1 hPa	±0.1 hPa	±0.3 hPa
Total accuracy			
(-40 ... +60 °C/-40 ... +140 °F)	±0.15 hPa	±0.25 hPa	±0.45 hPa
Long-term stability/year	±0.1 hPa	±0.1 hPa	±0.2 hPa
Response time (100 % response)			
one sensor	2 s	1 s	1 s
Pressure units	hPa, mbar, kPa, Pa, inHg, mmH2O, mmHg, torr, psia		

\* Defined as ±2 standard deviation limits of endpoint non-linearity, hysteresis error or repeatability error and calibration.

\*\* Defined as ±2 standard deviation limits of accuracy of the working standard including traceability to NIST.


\*\*\* Defined as the root sum of the squares (RSS) of endpoint non-linearity, hysteresis error, repeatability error and calibration uncertainty at room temperature.

\*\*\*\* Defined as ±2 standard deviation limits of temperature dependence over

### Temperature

Measurement range, all probes	-40 ... +60 °C (-40 ... +140 °F)
Accuracy at +20 °C (+68 °F)	±0.2 °C (±0.4 °F)
Temperature units	°C, °F

### Accuracy over temperature range

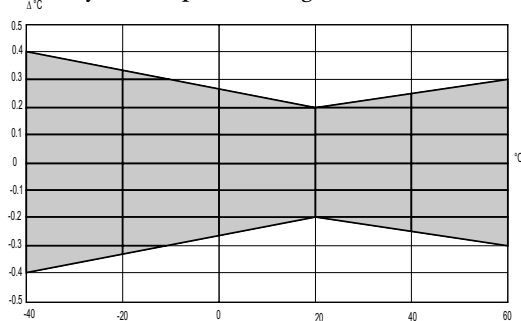

Temperature sensor PT100 RTD 1/3 Class B IEC 751

### Relative humidity

Measurement range	0 ... 100 % RH
-------------------	----------------

Accuracy (including non-linearity, hysteresis, and repeatability)

at +15 ... +25 °C	±1 %RH (0 ... 90 % RH)
	±1.7 %RH (90 ... 100 %RH)
at -20 ... +40 °C	±(1.0 + 0.008 x reading) %RH
at -40 ... +60 °C	±(1.5 + 0.015 x reading) %RH

Factory calibration uncertainty (+20 °C)

(Defined as ±2 standard deviation limits. Small variations possible, see also calibration certificate.)	±0.6 % RH (0 ... 40 %RH)
	±1.0 % RH (40 ... 97 %RH)

Sensor

for typical applications Vaisala HUMICAP® 180

for applications with chemical purge/warmed probe Vaisala HUMICAP® 180C

Response time (90 %) at +20 °C in still air	
with grid filter	8 s
with grid + steel netting filter	20 s
with sintered filter	40 s

## Operating Environment

Operating temperature	-40 ... +60 °C (-40 ... +140 °F)
with display	0 ... +60 °C (+32 ... +140 °F)
Humidity range	non-condensing
Electromagnetic compatibility	EN61326-1:1997 + Am1:1998 +Am2:2001; Industrial Environment

## Inputs and outputs

Operating voltage	10 ... 35 VDC, 24 VAC
with optional power supply module	100 ... 240 VAC, 50/60 Hz
Power consumption at +20 °C (U <sub>in</sub> 24 VDC)	
RS-232	max. 28 mA
U <sub>out</sub> 3 x 0 ... 1 V/0 ... 5 V/0 ... 10 V	max. 33 mA
I <sub>out</sub> 3 x 0 ... 20 mA	max. 63 mA
display and backlight	+20 mA
during chemical purge	max. +110 mA
during probe heating (HMT337)	+120 mA
Settling time at power-up (one sensor)	
class A	4 s
class B	3 s
External loads	
current outputs	R <sub>L</sub> < 500 ohm
0 ... 1 V output	R <sub>L</sub> > 2 kohm
0 ... 5 V and 0 ... 10 V outputs	R <sub>L</sub> > 10 kohm
Recommended wire size	0.5 mm <sup>2</sup> (AWG 20) stranded wires
Digital outputs	RS-232 (RS-485 optional)
Relay outputs (optional)	0.5 A, 250 VAC
Display	LCD with backlight, graphic trend display of any parameter
Menu languages	English, Finnish, French, German, Japanese, Spanish, Swedish
Analog outputs (optional)	
current output	0 ... 20 mA, 4 ... 20 mA
voltage output	0 ... 1 V, 0 ... 5 V, 0 ... 10 V
Humidity and temperature accuracy at +20 °C	±0.05% full scale
temperature dependence	±0.005%/°C full scale
Pressure	500...1100 hPa 50...1100 hPa
accuracy at +20 °C	±0.30 hPa ±0.40 hPa
accuracy at -40 ... +60 °C	±0.60 hPa ±0.75 hPa

## Mechanics

Cable bushing	M20 x 1.5 for cable diameter 8 ... 11 mm/0.31 ... 0.43"
Conduit fitting	1/2" NPT
User cable connector (optional)	M12 series 8-pin (male)
option 1	female plug with 5 m (16.4 ft) black cable
option 2	female plug with screw terminals
Probe cable diameter	
PTU303	6.0 mm
other probes	5.5 mm
Housing material	G-AlSi 10 Mg (DIN 1725)
Housing classification	IP 65 (NEMA 4)
Weight of PTU303 with 2-m cable	1.1 kg

## Accessories

PC software and cable	215005
Connection cable for HM70	211339
Wall mounting plate (plastic)	214829
Pole installation kit	215108
Rain shield	215109
DIN rail installation set	211477
Duct installation kit, PTU303/307	210697
Cable gland and AGRO, PTU303/307	HMP247CG
Solar radiation shield, PTU303/307/30T	DTR502B
Meteorological installation kit	HMT330MIK
Duct installation kit (T probe)	215003

## Dimensions

in mm (inches)

