

# HMI41 Indicator and HMP46 High Temperature Probe



*The HMI41 Indicator equipped with the HMI46 Probe is an ideal combination for spot checking and field calibration.*

## Features/Benefits

- RH measurement range 0...100 %RH
- $\pm 1\%$  accuracy
- Temperature measurement range -40...+100 °C, for short periods up to +180 °C
- Calculates dewpoint, wet bulb temperature, absolute humidity and mixing ratio
- Versatile and easy-to-use
- Incorporates Vaisala's HUMICAP® Sensor
- Excellent stability
- Data collection with serial line download capability
- NIST traceable (certificate included)

The HMI41 Hand-Held Indicator fitted with HMP46 Humidity and Temperature Probe can be used for spot checking humidity and temperature in ducts or chambers. Typical applications are plant maintenance, installation and inspection of air conditioning systems, production and storage areas and production processes. In addition, it is suitable for field checking Vaisala's humidity transmitters.

### Withstands high temperatures

HMP46 operates in full humidity range of 0...100 %RH. The temperature range is from -40 to +100 °C. For short periods of time, the probe can withstand temperatures up to +180 °C. The HMP46 probe is solid and rugged. Its stainless steel probe head is made to withstand rough handling in mechanically demanding applications. The probe's long shaft can also reach otherwise unreachable places.

### Versatile and easy to use

In addition to displaying the humidity and temperature readings, the HMI41 Indicator calculates dewpoint and wet bulb temperature, absolute humidity and mixing ratio.

The indicator has an easy-to-read two line liquid crystal display. The display units (metric or non-metric) are easily selected.

These features, plus fast response time, high measurement accuracy and excellent stability, as well as the wide temperature range of the probe, make the HMI41/HMP46 combination an ideal choice for the most demanding applications.

### High performance sensor

The HMP46 Probe incorporates Vaisala's HUMICAP® Sensor. This sensor has high accuracy, excellent long-term stability and negligible hysteresis. In addition, the sensor is insensitive to dust, particulate dirt and most chemicals.


# Technical Data

## HMI41 Indicator

Calculated variables	dewpoint temperature, absolute humidity, wet bulb temperature, mixing ratio
Resolution	0.1 %RH; 0.1 °C
Power supply	4 batteries, type AA (LR 6)
Battery operation time (alkaline batteries)	72 h continuous use
Auto-off function	
Operating temperature	-20...+60 °C
Storage temperature	-40...+70 °C
Display	two line LCD
Housing material	ABS plastic
Housing classification	IP53 (with connectors blocked)
Weight (incl. batteries)	300 g
carrying case for HMI41 & HMP46	part no. 210614
serial communication cable	part no. 19446ZZ
Maximum measurement error of indicator at +20 °C	
humidity	±0.1 %RH
temperature	±0.1 °C

## HMP46 Probe


Humidity	
Measurement range	0...100 %RH non-condensing
Maximum achievable accuracy when calibrated against high quality, certified humidity standards	
0...90 %RH	±1 %RH
90...100 %RH	±2 %RH
when calibrated against salt solutions (ASTM E104-85)	
0...90 %RH	±2 %RH
90...100 %RH	±3 %RH
Temperature Dependence	

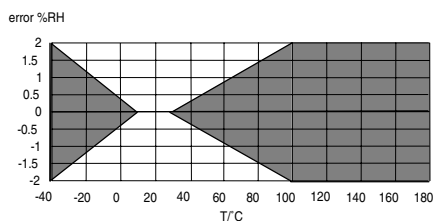

Typical long-term stability better than 1 %RH per year  
 Response time (90%) 15 s  
 at +20°C in still air w/sintered filter  
 Humidity sensor HUMICAP® 180

## Temperature

Continuous measurement	-40...+100 °C
Short-term measurement	-40...+180 °C
Accuracy at +20 °C	±0.2 °C
Accuracy over the measurement range	

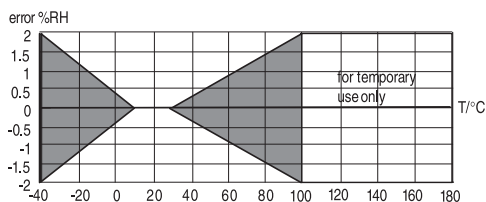

Temperature sensor Pt 100 IEC 751 1/3 class B

## General

Typical ranges of calculated variables	
dewpoint temperature	-40...+100 °C
absolute humidity	0...600 g/m <sup>3</sup>
wet bulb temperature	0...100 °C
mixing ratio	0...600 g/kg d.a.
Cable length	1500 mm; extended spiral cable
Operating temperature range for electronics	-20...+60 °C
Housing material	
Electronics housing	ABS plastic
Probe head	stainless steel
Housing classification	
electronics	IP65
Sensor protection	sintered filter, part no. 0195
option	membrane filter, part no. 10159HM
	plastic grid, part no. 6221
Weight	450 g

Complies with EMC standard EN61326-1:1997 + Am1:1998; Industrial Environment.


## Accessories

Transmitter calibration cables	
Cable Part #	for Calibrating
19116ZZ	HM60/70's, HMP40's, HMM22D, HMW61/71
19164ZZ	HMP230's, HMM210
19165ZZ	HM20/30's, HMP130's, HMM30C
25917ZZ	HMT320's for use in 'safe' zones

PC cable 19446ZZ

## Dimensions

Dimensions in mm.

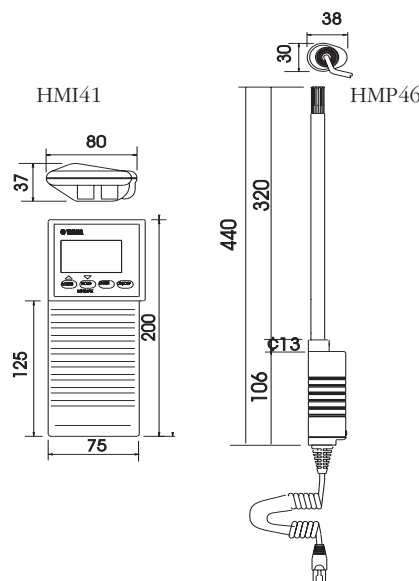

HUMICAP® is a registered trademark of Vaisala. Specifications subject to change without prior notice. © Vaisala Oyj

